
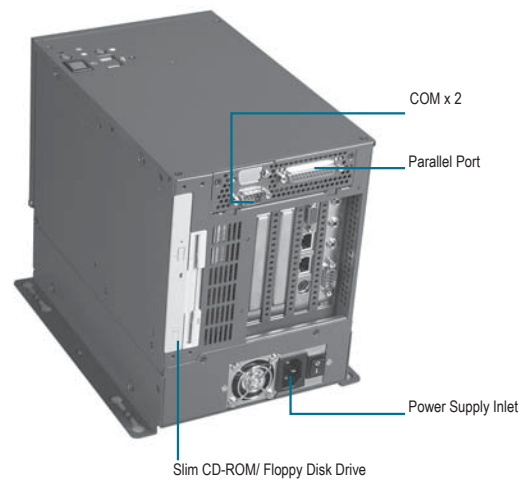


# AEC-204B

## 4-slot Industrial Wallmount IPC System Half-size CPU Cards Supports

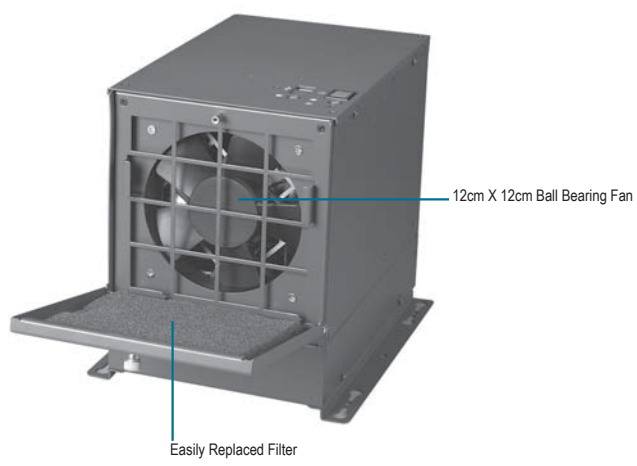

### Features


- Supports High Performance Half-size CPU Cards and 4-slot PISA/ISA Bus Passive Backplanes
- Supports One Anti-vibration 3.5" HDD Bay and One Front Access 3.5" FDD (or Slim CD-ROM / FDD)
- One 12cm Ball Bearing Cooling Fan and Replaceable Filter
- Supports Standard 1U Power Supply
- Anti-Vibration Design for Fix CPU Card to Keep System Stable



### Specifications

System	
Construction	Heavy-duty Steel
Storage	External: Slim CD-ROM & Floppy Disk Drive x 1 or 3.5" Floppy Disk Drive x 1 (Front Accessible) Internal: 3.5" Hard Disk Drive Bay
System Fan	One 12 cm Ball Bearing Fan with Removable Filter (Flow-in)
Front Panel	Power On/ Off Switch x 1, Reset x 1 Power LED x 1, IDE LED x 1
Rear Panel	USB Port x 2 COM Port x 2 Parallel Port x 1
Color	Gray
Dimension	6.4"(W) x 8.2"(H) x 10.0"(D) (162.5mm x 207.5mm x 253.5mm)
Carton Size	15.04" (W) x 10.75" (H) x 14.37" (D) (382mm x 273mm x 365mm)
Net Weight	12.8 lb (5.8kg)
Gross Weight	15.6 lb (7.1kg)
Environmental	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	-4°F ~ 140°F (-20°C~ 60°C)
Operating Humidity	5 ~ 95%
Storage Humidity	5 ~ 95%@40°C, non-condensing
Vibration	1G / 5 ~ 500Hz / random operation
Shock	15G peak acceleration (11 msec. duration)

## Dimension Unit: mm

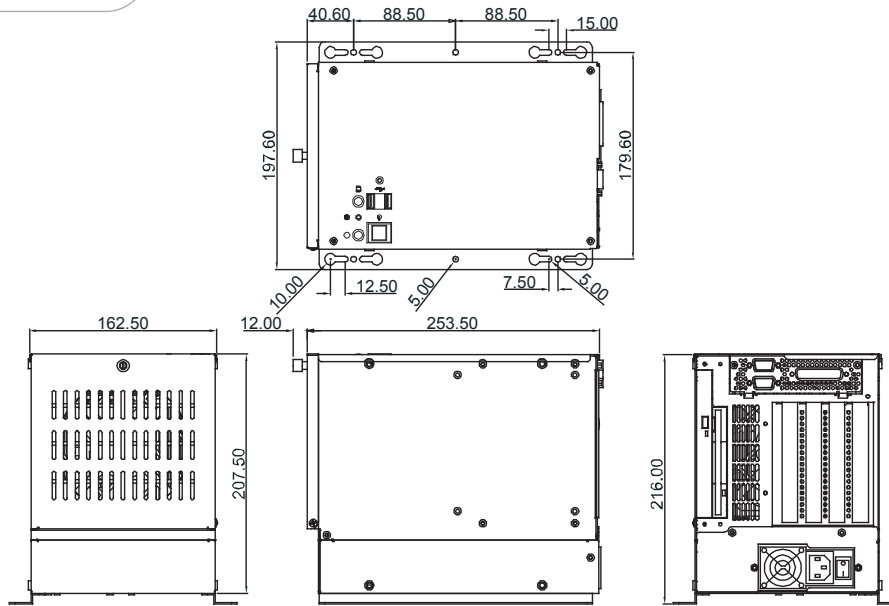

## Power Supply Options

P/N	TYPE	PFC Support	Input Voltage	Watt	Size
TF-PW-H150-A-00	ATX	Active PFC	Auto 115-230V	150W	1U (18.5cm)

## Passive Backplane Options

P/N	Description	Master Interface	Slots	Power Connector, ATX Extend Function
BP-204SI-A13	Wallmount, ISA 4-slot, Backplane, 4 ISA, Single Segment, AT, Rev. A1.3	ISA	0/4/0 (PCI/ ISA/ PICMG)	AT
TF-BP-204SS-P1-A11	Wallmount, PISA 4-slot, Backplane, 1 PCI, 2 ISA, Single Segment, AT/ATX, Ver. 1.1	PCISA	1/2/2 (PCI/ ISA/ PISA)	AT
TF-BP-204SS-P2-A10	Wallmount, PISA 4-slot, Backplane, 2 PCI, 1 ISA, Single Segment, AT, Ver. 1.0	PCISA	1/1/1/1 (PCI/ ISA/ PISA/ PICMG_PCI)	ATX, 6-pin ATX extend
TF-BP-204SP-P3-A11	Wallmount, PCI 4-slot, Backplane, 3 PCI, Single Segment, AT/ATX, Rev. A1.1, Bulk Pack	PCI	3/0/1 (PCI/ ISA/ PICMG_PCI)	ATX, 3-pin ATX extend

## CPU Cards Options

Model/Name	Description	Master Interface
TF-HSB-815P	Onboard AMD LX800 CPU	PCI
TF-HSB-811P	Onboard Celeron® M(600MHz); Socket 479 P-M (1.2 GHz)/ Celeron® M (900MHz)	PCI
SBC-659	Socket 370 for PIII and Celeron® up to 1.4GHz (66/100/133MHz)	PCI
TF-HSB-813S	Socket 479 P-M (2.0 GHz)/ Celeron® M (900MHz)	PCISA
HSB-660S	Socket 370 for PIII and Celeron® up to 1.4GHz (66/100/133MHz)	PCISA
TF-HSB-668I	Onboard VIA CoreFusion 533 MHz CPU	ISA
HSB-660I	Socket 370 for PIII and Celeron® up to 1.4GHz (66/100/133MHz)	ISA

## Ordering Information

Model/Name	Description	Remark
TF-AEC-204B-B	Wallmount, 4-Slot Chassis Bare, 1U Power (20.5cm), PS_SW(ATX), Black	

## Accessories Options

Model/Name	Description	Remark
9761224E04	Accessory CD-ROM for AEC-204	